

INSTRUCTIONS FOR EXTEND-A-TRUCK 2-IN-1 LOAD SUPPORT

The Extend-A-Truck can be used to support loads at roof height or at bed level of a pickup or SUV with a 2" class III receiver hitch.

1. Choose the appropriate end of the "L" to insert into the hitch.

To use the Extend-A-Truck at bed level, insert the long end of the "L" into the receiver hitch and insert pin and keeper pin.

To use the Extend-A-Truck at roof level, insert the short end of the "L" into the receiver hitch and insert pin and keeper pin.

2. Next, simply position the "T" on the other end of the "L", and insert pin and keeper pin at desired height.

When hauling heavy loads, keep the Extend-A-Truck support bar level with the truck bed and place the load as far forward as possible in the truck, allowing less than 350 Lbs. on the support bar.

- When the Extend-A-Truck is **NOT** in use supporting a load, **ALWAYS REMOVE IT FROM THE RECEIVER HITCH.**
- Check local and state laws before using the Extend-A-Truck.
- Always securely tie down the front and rear of all loads.
- Do not allow bulky loads to block the vision of brake lights and/or turn signals.
- Secure both pins with keeper pins.
- Use a red flag on the end of all loads.

When using Extend-A-Truck at roof level, rope or ratchet strap must be tightly secured diagonally to the vehicle's bumper. This is in addition to the strap used to secure the load to the "T" support bar.

WARNING


The user assumes all risks associated with the use of this product, including risk of property damage, and/or personal injury/death.

Do not exceed the 350 Lb. maximum weight on the Extend-A-Truck.

Do not use the Extend-A-Truck in darkness, or in conditions with poor visibility.

LIFETIME LIMITED WARRANTY

Darby Industries, Inc. (manufacturer) will, at its option, replace or repair without charge to the original purchaser any part or parts found upon examination at the manufacturer's factory in Falls, PA, USA, to be defective in material or workmanship. This warranty does not obligate Darby Industries, Inc. to bear any transportation charges in connection with replacement/repair of the defective part(s). This Lifetime Limited Warranty does not cover abuse or misuse.

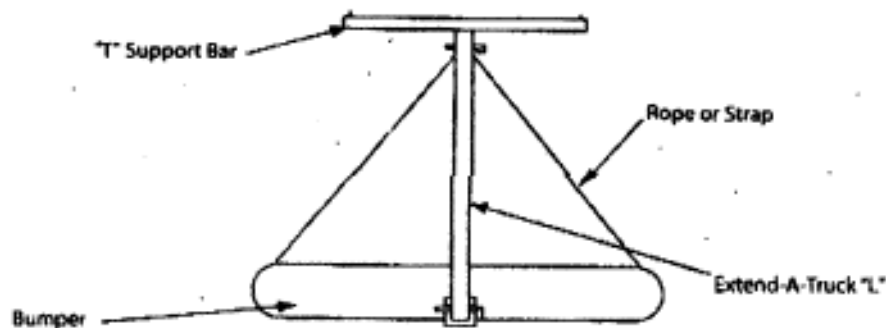

IMPORTANT: When using Extend-A-Truck at roof level, rope or ratchet strap must be tightly secured diagonally to the vehicle's bumper. This is in addition to the strap used to secure the load to the "T" support bar

NOTICE: In case you should encounter any missing parts or defective units, please **DO NOT** contact the retailer where you purchased this item; instead, please contact Darby Industries, Inc. directly at 1-800-344-2472.

Darby Industries, Inc. Falls, PA 18815. 1-800-344-2472. www.ExtendATruck.com